


应用场合

光缆主要应用于船上的数据传输，特别是大型油游轮上。
有低烟、无卤和阻燃要求时，推荐采用光缆。

TBW 结构

1. 中心 ERP 增强芯
2. 带护套的光纤
250/900 μm
3. 玻璃纤维增强
4. 外护套
黑色 LSHF 阻燃塑料

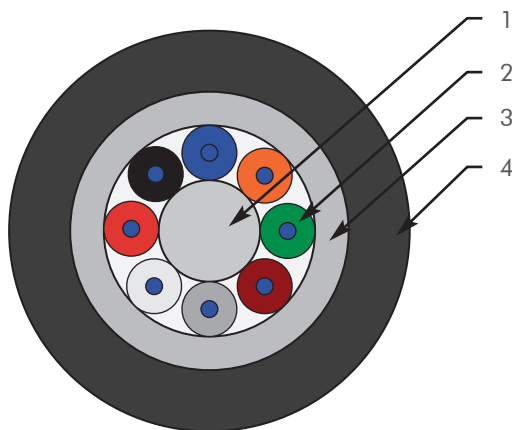

打印信息

Nexans Fiber Optic cable TBW
SP 1678 «n» x «ft»

打印信息

Nexans Fiber Optic cable
UG LSZH
SP 767 «n» x «ft» - FB

						
耐火 IEC 60331-25(180')	阻燃 IEC 60332-1 FRT 60332-3	阻燃 IEC 60332-3-25	防水	无卤	低烟	-40 + 70 °C

TBW 结构 - 光缆

光纤数	电缆外径 (mm)	重量 (kg/km)	最小弯曲半径 (无张力) (mm)	最小弯曲半径 (有张力) (mm)	最大拉力 (daN)
4/6	5.7	38	55	85	100
8	6.5	47	65	95	100
12	6.7	49	70	100	100
24	7.9	75	80	120	175

可以根据需要进行定制