

Endure™ Pro Series LED Wall Pack

PRIMARY APPLICATIONS

Ideal for a variety of complex non-hazardous applications such as mining, food processing, marine, wastewater treatment, heavy manufacturing and general wash-down areas.

LUMINAIRE MODELS

Model Number	Equivalent HID Luminaire	Typical Energy Savings/Lifetime
FM1 B01	50W	59%
FM1 B02	70W	43%


50,000 hours of continuous operation!

CERTIFICATIONS & COMPLIANCES

- UL1598
- cUL
- IP66

ELECTRICAL RATINGS

- Input Power: 27W, 51W

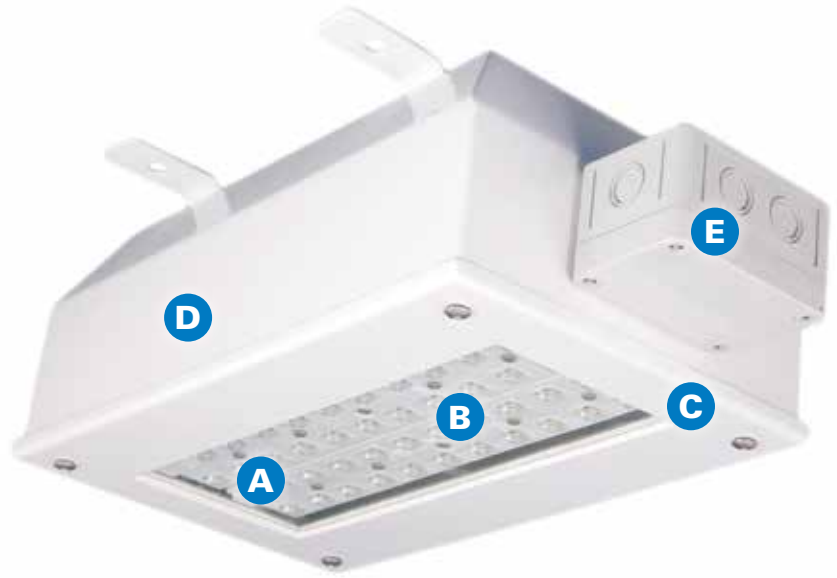

50,000 hours rated life and up to 59% more energy-efficient than equivalent 70 watt HID luminaire

DESIGN FEATURES

- A White light** - Provides superior color rendering and ambient clarity. Optics are precisely designed to shape the distribution, maximizing efficiency and application spacing.
- B Energy efficiency and longer life** - 50,000 hours rated life and up to 59% more energy-efficient than the 70W high pressure sodium equivalent.
- C Reduction in light pollution** - Controlled distribution of light means far less light loss.
- D IP66 ingress protection rating and -30°C to 50°C ambient temperature rating** - Ensures trouble-free operation in a variety of harsh and complex applications.
- E Junction box** - Polycarbonate, IP66 rated, four screws to access cover, double row terminal box to expedite installation.

