

CMBF Berth Fluorescent Luminaire

Product Introduction

Housing

Galvanized Steel, with
RAL9016 white powder
coated, Optional SS316L

Switch

Double pole switch and
receptacle provided

Diffuser

Acrylic

Electric

Magnetic Ballast

Lamp Base

G5

Application Area

IP20, berth light or desk
light

Mounting

Surface mounting

Entries

Two $\phi 10$ entry holes on
back, with rubber grommet

Terminal Block

3 pole 6mm² max

Ambient Temp

-25 °C~+55 °C

Certificate

DNV



Ordering Information


CMBF	-16	-18	-126	-NR
	00-Galvanized Steel 16-Stainless Steel 316L	18-1x8W	126-120V 60Hz 225-220V 50Hz 236-230V 60Hz 235-230V 50Hz	NR-Without Socket

Commonly Ordered Luminaires

Wattage	Volt /Fre	Description	Material Code	L mm	W mm	D mm	Weight kg
1x8W	120V 60Hz	CMBF-00-18-126	CCL1100023	340	41	88	0.9
	230V 60Hz	CMBF-00-18-236	CCL1100024				
	220V 50Hz	CMBF-00-18-225	CCL1100025				
	230V 50Hz	CMBF-00-18-235	CCL1209454				

Please consult Eaton's Crouse-Hinds for more configurations!

Dimensions

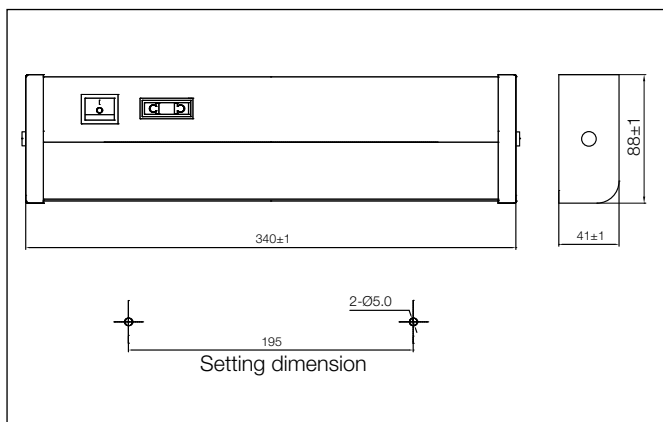

Polar Curves

