

wLLK Surface Fluorescent Luminaire

Product Introduction

Permissible ambient

-25°C ~ +45°C

Rated voltage

110-240V, 50/60Hz;
220-240V, 50/60Hz

Power factor

0.98

Enclosure material

Glass-fibre reinforced polyester, 7J impact-resistant

Protective cover

Polycarbonate, 4J impact-resistant

Ingress Protection

IP66

Isolation Class

I

Charging duration

> 16Hrs, 20±5°C

Connecting terminals

L1, L2, L3, L, N, PE;
Max.2x6mm² single wire per terminal

Entries

M20/M25

Lamp/lamp base

T8, G13 lamp base

Weight

wLLK 2x18W, approx. 4 kg

wLLK 2x36W, approx. 6 kg



Ordering Information

wLLK	-236	-E	-EM	-220
	236-T8 2x36W	E-110~240V 50/60Hz	EM-120min Emergency	225-2*M25 at one end
	218-T8 2x18W	E2-220~240V 50/60Hz	EM3-180min Emergency	425-4*M25(2 plastic plugs)
				220-2*M20 at one end
				420-4*M20(2 plastic plugs)

Commonly Ordered luminaires

Wattage	Volt/Fre	Description	Material code	L mm	W mm	H mm	Weight kg
2x18W	110V~240V 50/60Hz	wLLK-218-E-425	CCL1209681	760	188	130	4
	220V~240V 50/60Hz	wLLK-218-E2-425	CCL1209693	760	188	130	
2x18W Emergency	110V~240V 50/60Hz	wLLK-218-E-EM-425	CCL1215000	760	188	130	5
	220V~240V 50/60Hz	wLLK-218-E2-EM-425	CCL1209697	760	188	130	
2x36W	110V~240V 50/60Hz	wLLK-236-E-425	CCL1215002	1360	188	130	6
	220V~240V 50/60Hz	wLLK-236-E2-425	CCL1209669	1360	188	130	
2x36W Emergency	110V~240V 50/60Hz	wLLK-236-E-EM-425	CCL1215001	1360	188	130	7
	220V~240V 50/60Hz	wLLK-236-E2-EM-425	CCL1209673	1360	188	130	


Please consult Eaton's Crouse-Hinds for more configurations!

Pipe Clamp

Part No	Description	Material	Pipe DN	Outer D(mm)	Qty
CHR5219	Pipe Clamp Asy D42 304SS	Stainless steel	DN32	42	2
CHR5220	Pipe Clamp Asy D42 plating	Hot dip galvanizing	DN32	42	2
CHR5222	Pipe Clamp Asy D51 304SS	Stainless steel	DN40	51	2
CHR5223	Pipe Clamp Asy D51 plating	Hot dip galvanizing	DN40	51	2
CHR5225	Pipe Clamp Asy D60 304SS	Stainless steel	DN50	60	2
CHR5226	Pipe Clamp Asy D60 plating	Hot dip galvanizing	DN50	60	2
Part No	Description	Material	Qty		
CHR5246	Ceiling Mounting BKT 304SS	Stainless steel	2		
CHR5247	Ceiling Mounting BKT Plating	Hot dip galvanizing	2		


wLLK Surface Fluorescent Luminaire

Dimensions

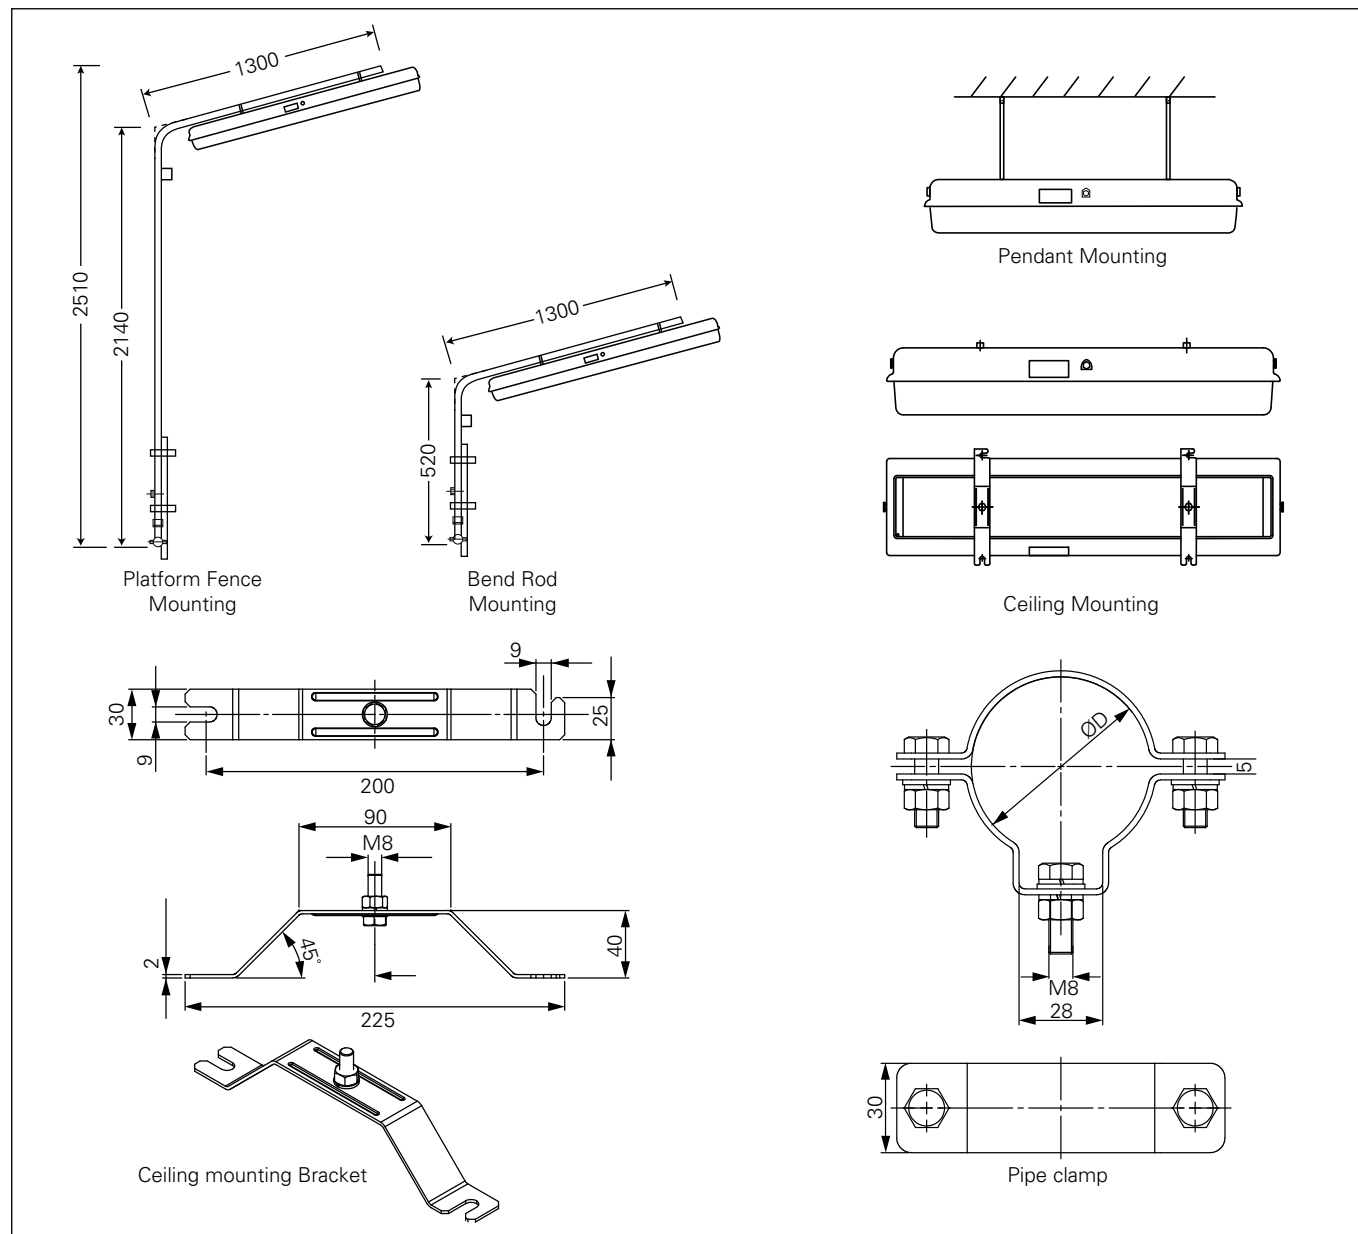

wLLK Surface Fluorescent Luminaire

Dimensions

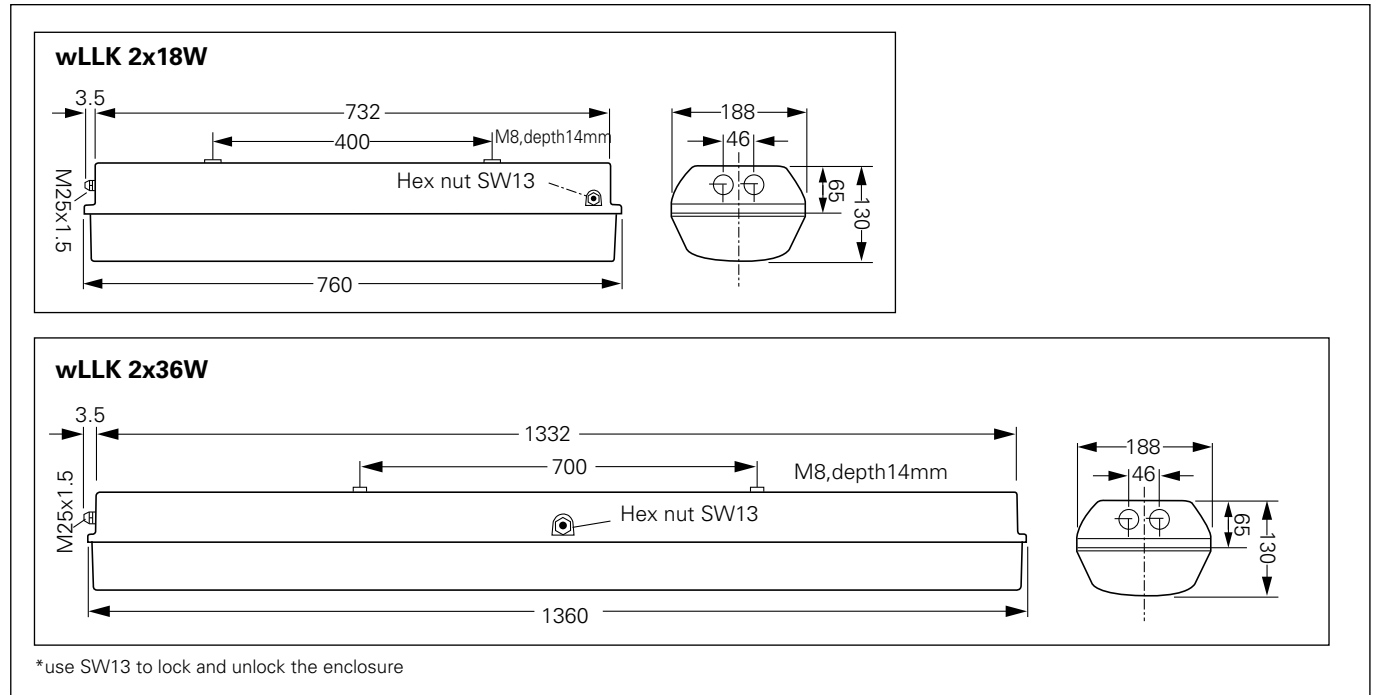

Polar Curves

