

CMHP High Pressure Sodium Floodlight

Product Introduction

Housing

Deep drawn steel housing; Tool-less design; Galvanized steel housing with RAL9016 white powder coated, SS316L housing are available

Diffuser

Tempered Glass

Lamp Holder

E40

Ballast

Magnetic Ballast in separate ballast Box, IP66

Application Area

IP66, for engine room, up-deck, or other watertight required spaces

Lamp

High Pressure sodium: 250W, 400W

Mounting

Stainless steel mounting brackets, see "Dimension" for detail

Entries

Connect box, with two M22 brass cable glands

Terminal Block

3 pole 6mm² max

Ambient Temp

Standard: -25 °C~+55 °C



Ordering Information

CMHP	16	-02	-225
	00-Galvanized Steel	02-250W	225-220V 50Hz
	16-Stainless Steel 316L	04-400W	226-220V 60Hz
		042-2x400W	235-230V 50Hz
			236-230V 60Hz
			245-240V 50Hz
			246-240V 60Hz

Commonly Ordered Luminaires


Wattage	Volt/Fre	Description	Material code	Weight kg
250W	220V 50Hz	CMHP16-02-225	CCL1209287	15
	230V 60Hz	CMHP16-02-236	CCL1209290	
400W	220V 50Hz	CMHP16-04-225	CCL1209317	
	230V 60Hz	CMHP16-04-236	CCL1209320	
2x400W	220V 50Hz	CMHP16-042-225	CCL1209256	30
	230V 60Hz	CMHP16-042-236	CCL1209259	

Please consult Eaton's Crouse-Hinds for more configurations!

CMHP High Pressure Sodium Floodlight

Dimensions

250W & 400W:

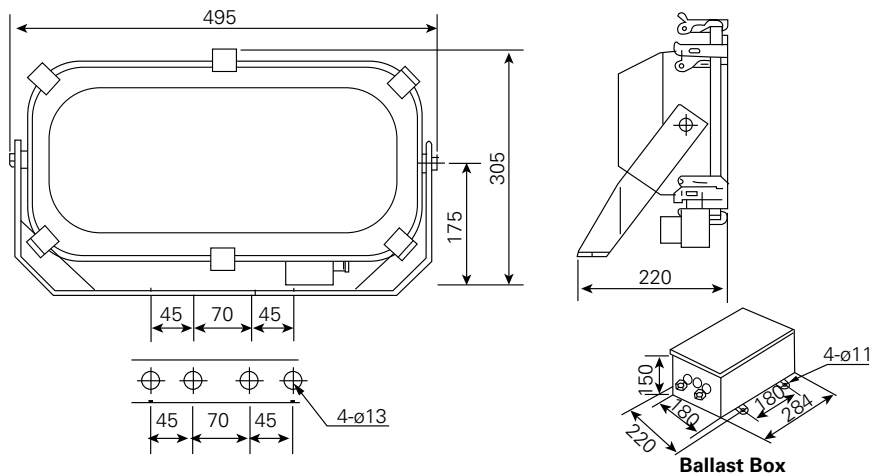

2x400W:

