


IXSU-F / OXSU-F

For polymeric cables up to 42kV.
Heat shrinkable medium voltage terminations
for indoor and outdoor applications.

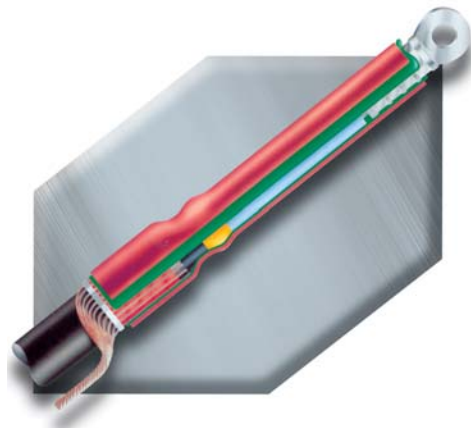

12kV Single Core - Termination Family

Indoor

Ref	Cross Section mm ²
IXSU-F 3111	10 - 35
IXSU-F 3121	25 - 95
IXSU-F 3131	95 - 240
IXSU-F 3141	240 - 500
IXSU-F 3151	500 - 800

Outdoor

Ref	Cross Section mm ²
OXSU-F 3111	10 - 35
OXSU-F 3121	25 - 95
OXSU-F 3131	95 - 240
OXSU-F 3141	240 - 500
OXSU-F 3151	500 - 800

12kV Screened 3 Core without Armour - Termination Family

Indoor

Ref	Tail Length mm	Cross Section mm ²
IXSU-F 3301	450	10 - 16
IXSU-F 3304	1200	10 - 16
IXSU-F 3311	450	16 - 35
IXSU-F 3314	1200	16 - 35
IXSU-F 3321	450	25 - 70
IXSU-F 3324	1200	25 - 70
IXSU-F 3331	450	95 - 240
IXSU-F 3334	1200	95 - 240
IXSU-F 3341	450	240 - 500
IXSU-F 3344	1200	240 - 500

Outdoor

Ref	Tail Length mm	Cross Section mm ²
OXSU-F 3301	450	10 - 16
OXSU-F 3304	1200	10 - 16
OXSU-F 3311	450	16 - 35
OXSU-F 3314	1200	16 - 35
OXSU-F 3321	450	25 - 70
OXSU-F 3324	1200	25 - 70
OXSU-F 3331	450	95 - 240
OXSU-F 3334	1200	95 - 240
OXSU-F 3341	450	240 - 500
OXSU-F 3344	1200	240 - 500

17.5 / 24 / 42kV versions available.

36kV Single Core - Termination Family

Indoor

Ref	Cross Section mm ²
IXSU-F 6131	50 - 120
IXSU-F 6141	120 - 400
IXSU-F 6151	400 - 800

Outdoor

Ref	Cross Section mm ²
OXSU-F 6131	50 - 120
OXSU-F 6141	120 - 400
OXSU-F 6151	400 - 800

36kV Screened 3 Core without Armour - Termination Family

Indoor

Ref	Tail Length mm	Cross Section mm ²
IXSU-F 6332	650	50 - 120
IXSU-F 6334	1200	50 - 120
IXSU-F 6342	650	120 - 300
IXSU-F 6344	1200	120 - 300
IXSU-F 6352	650	400 - 500
IXSU-F 6354	1200	400 - 500

Outdoor

Ref	Tail Length mm	Cross Section mm ²
OXSU-F 6332	650	50 - 120
OXSU-F 6334	1200	50 - 120
OXSU-F 6342	650	120 - 300
OXSU-F 6344	1200	120 - 300
OXSU-F 6352	650	400 - 500
OXSU-F 6354	1200	400 - 500

17.5 / 24 / 42kV versions available.