

MRF Recessed Fluorescent Luminaire

Product Introduction

Housing

Galvanized Steel, optional Stainless Steel 316L housing with RAL9016 white powder coated, highly corrosion and vibration resistant.

Diffuser

Clear PC or Translucent white PC

Electric

Electronic ballast. Optional 90 or 180mins emergency battery for single lamp, with LED working indication. Optional through wiring.

Lamp Base

G13

Application Area

For recessed installation in solid ceilings where IP66 is required.

Mounting

To be installed in ceiling cut out with adjustable suspension brackets

Entries

Two M20 (M25) cable gland on one end, optional two cable gland on each end

Terminal Block

6 pole 6mm² max, optional through wiring

Ambient Temp

-25 °C ~ +45 °C

Certificate

DNV, B15



Ordering Information

MRF /00	/236	/E2	/EM	/1-220	/CP	/G
00-Galvanized Steel	218-2x18W	E-110~240V 50/60Hz	EM-90 mins emergency	1-225 -Single-ended 2xM25 w/plug	CP-Clear PC	Blank-Continuous ceiling
16-SS316L	236-2x36W	E2-220~240V 50/60Hz	EM3-180 mins emergency	2-225 -Through wiring 2xM25 w/plug	TP-Translucent white PC	G-Gap ceiling
		D-220~240V 50/60Hz		1-220 -Single-ended 2xM20 w/plug		
		Dimming Ballast		2-220 -Through wiring 2xM20 w/plug		


Commonly Ordered Luminaires

Wattage	Volt/Fre	Description	Material code	L mm	W mm	D mm	Weight kg
2x18W	220V~240V 50/60Hz	MRF/00/218/E2/1-220/CP	CCL1213223	778	275	128	7
		MRF/00/218/E2/1-220/TP	CCL1213224				
2x18W Emergency	220V~240V 50/60Hz	MRF/00/218/E2/EM/1-220/CP	CCL1213225	1392	275	128	10
		MRF/00/218/E2/EM/1-220/TP	CCL1213226				
	MRF/00/218/E2/EM3/1-220/CP	CCL1213227					
	MRF/00/218/E2/EM3/1-220/TP	CCL1213228					
2x36W	220V~240V 50/60Hz	MRF/00/236/E2/1-220/CP	CCL1213229	1392	275	128	12
		MRF/00/236/E2/1-220/TP	CCL1213230				
2x36W Emergency	220V~240V 50/60Hz	MRF/00/236/E2/EM/1-220/CP	CCL1213231	1392	275	128	15
		MRF/00/236/E2/EM/1-220/TP	CCL1213232				
	MRF/00/236/E2/EM3/1-220/CP	CCL1213233					
	MRF/00/236/E2/EM3/1-220/TP	CCL1213234					

Please consult Eaton's Crouse-Hinds for more configurations!

MRF Recessed Fluorescent Luminaire

Dimensions

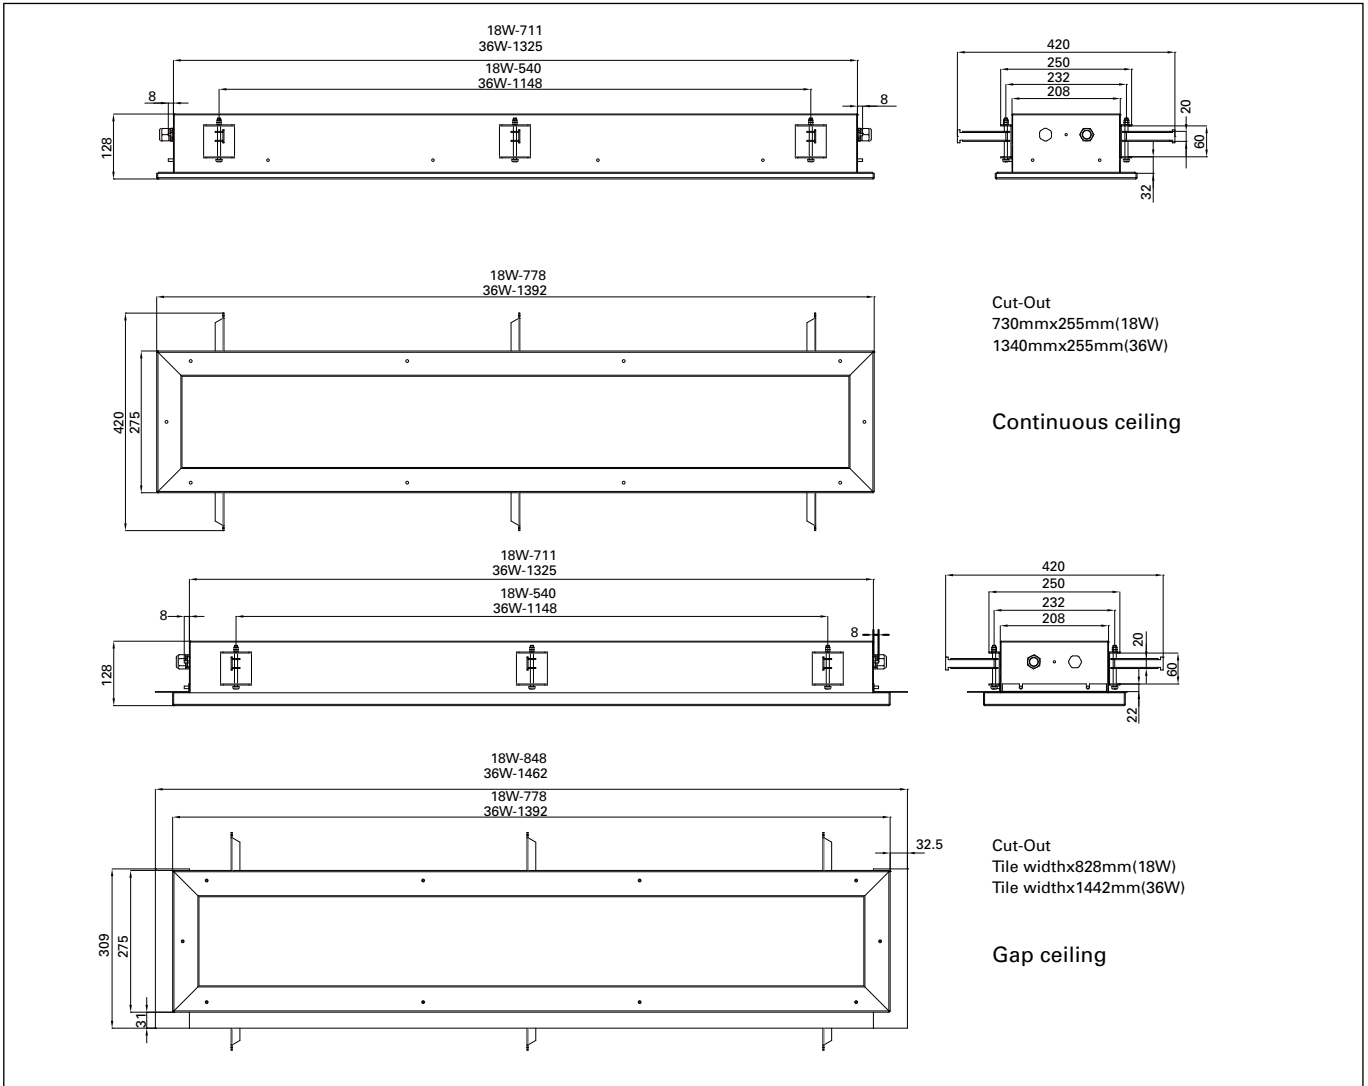

Polar Curves

