

EUROCAP

Product Introduction

Type of Cable Gland


- With elastomeric seal

Cable type

- Unarmoured round cable

Certifications and Compliances

- EN 50262

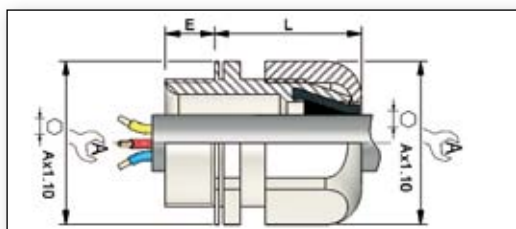

Features:

- Material: Polyamide 6/6 – UL 94 V0– Halogen free
- Color: Grey RAL 7035 or Black RAL9005
- Neoprene sealing ring
- Max operating temperature: +150°C
- Continuous operating temperature: -40°C to +100°C
- IP68: 5 bars without sealing washer except Pg36/42/48 and ISO 40/50/63 according to NF EN 60529
- Entry thread metric: ISO-NF EN 60423 and NF EN 50262
- Entry thread electrical guide: UTE C 68-311 – DIN 40430

Thread Size ISO	Code		Cable Outer Diameter (mm)	Hexagon Dimension 'A' ** (mm)	Gland Length 'L' (mm)	Thread Length 'E' (mm)	Sealing Washer	Locknut	
	Grey	Black						Grey	Black
12	CAP401270	CAP401260	3.5-6.5	15	21	8	CAP221249	CAP261273	CAP261203
16	CAP401670	CAP401660	4-8	19	25	8	CAP221649	CAP261673	CAP261603
20	CAP402070	CAP402060	6-12	24	33	9	CAP222049	CAP262073	CAP262003
25	CAP402570	CAP402560	12-18	32	36	11	CAP222549	CAP262573	CAP262503
32	CAP403270	CAP403260	17-25	42	40	11	CAP223249	CAP263273	CAP263203
40*	CAP404070	CAP404060	20-32	53	36	11	CAP224049*	CAP264073	CAP264003
50*	CAP405070	CAP405060	26-38	60	36	11	CAP225049*	CAP265073	CAP265003
63*	CAP406370	CAP406360	30-44	68	36	11	CAP226349*	CAP266373	CAP266303

* Delivered with the sealing washer

** A is the parallel-edge distance of Hexagon, and the diagonal-edge distance is Ax1.1.

Thread Size PG	Code		Cable Outer Diameter (mm)	Hexagon Dimension 'A' ** (mm)	Gland Length 'L' (mm)	Thread Length 'E' (mm)	Sealing Washer	Locknut	
	Grey	Black						Grey	Black
7	CAP410770	CAP410760	3.5-6.5	15	21	8	CAP240749	CAP260770	CAP260760
9	CAP410970	CAP410960	4-8	19	25	8	CAP240949	CAP260970	CAP260960
11	CAP411170	CAP411160	5-10	22	29	8	CAP241149	CAP261170	CAP261160
13	CAP411370	CAP411360	6-12	24	33	9	CAP241349	CAP261370	CAP261360
16	CAP411670	CAP411660	9-14	27	34	10	CAP241649	CAP261670	CAP261660
21	CAP412170	CAP412160	12-18	33	36	11	CAP242149	CAP262170	CAP262160
29*	CAP412970	CAP412960	17-25	42	40	11	CAP242949*	CAP262970	CAP262960
36*	CAP413670	CAP413660	20-32	53	51	13	CAP243649*	CAP263670	CAP263660
42*	CAP414270	CAP414260	26-38	60	50	13	CAP244249*	CAP264270	CAP264260
48 DIN*	CAP414870	CAP414860	30-44	65	53	14	CAP244849*	CAP264878	CAP264879

* Delivered with the sealing washer

** A is the parallel-edge distance of Hexagon, and the diagonal-edge distance is Ax1.1.